


ROVVI®

WIRES & CABLES

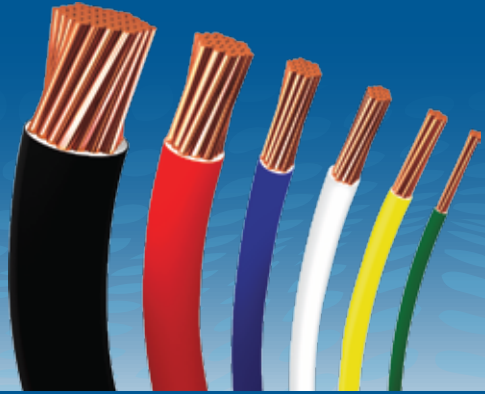

100%

- ✓ CONDUCTIVITY in VIRGIN COPPER
- ✓ LEAD-FREE PVC with DUAL INSULATION
- ✓ QUALITY PRODUCT

FLAME RETARDANT

SCRATCH & FRICTION RESISTANT

SMOOTH NYLON FOR EASY INSTALLATION

600
Volts

Withstands
90°C
in dry locations

Withstands
75°C
in wet locations

BUILDING WIRES

Product Description	Gauge	Size	90°C THHN Ampacity*	M/Pkg	Base Price
---------------------	-------	------	---------------------	-------	------------

THHN/THWN Stranded
Thermoplastic High Heat-resistant with Nylon /
Thermoplastic High Water-resistant with Nylon

Available colors: Red, Yellow, Green, Blue, White & Black



RTN14A	14 AWG	2.0mm ²	35	150M/Box	1,350
				750M/Spool	6,750
RTN12A	12 AWG	3.5mm ²	40	150M/Box	1,980
				500M/Spool	6,600
RTN10A	10 AWG	5.5mm ²	55	150M/Box	3,030
				500M/Coil	10,100
RTN8A	8 AWG	8.0mm ²	75	100M/Box	3,160
				300M/Coil	9,480
RTN6A	6 AWG	14mm ²	105	150M/Coil	7,545
RTN4A	4 AWG	22mm ²	140		11,850
RTN2A	2 AWG	30mm ²	170		17,265
RTN1A	1 AWG	38mm ²	195	300M/Reel	50,160
RTN1/0A	1/0 AWG	50mm ²	235		56,340
RTN2/0A	2/0 AWG	60mm ²	260		69,330
RTN3/0A	3/0 AWG	80mm ²	320		85,920
RTN4/0A	4/0 AWG	100mm ²	370		105,540
RTN250M	250 MCM	125mm ²	420	300M/Reel	135,000
RTN300M	300 MCM	150mm ²	475		161,100
RTN400M	400 MCM	200mm ²	570		202,800
RTN500M	500 MCM	250mm ²	655		261,000

*Ampacity in accordance with NEC2009 for single-insulated conductor in free air with a ambient air temperature of 30°C.

APRIL 2018 WIRES & CABLES PRICE LIST

(Prices are subject to change without prior notice)

FIREFLY ELECTRIC & LIGHTING CORP.

7/F Zen Offices Bldg. 1111 Natividad Lopez St., Ermita, Manila, Philippines
T: (02) 7891000 (Trunkline)
www.fireflyelectric.com • info@fireflyelectric.com

Contact Person:

BUILDING WIRES

Product Description	Type	Gauge	Size	60°C TW Ampacity*	Color	M/Pkg	Base Price
<p>ROYUX NM Non Metallic Sheathed Cable</p>	RNM	RNM14AXWT	14	1.6mm/2C	White	75M/Box	1,650
		RNM12AXWT	12	2.0mm/2C		300M/Coil	6,600
		RNM10AXWT	10	2.6mm/2C		75M/Box	2,265
						300M/Coil	9,060
					75M/Box	3,135	



TW Stranded
Thermoplastic Water-resistant

RTW14ABK150	14 AWG	2.0mm ²	20	Black	150M/Box	1,350
RTW12ABK150	12 AWG	3.5mm ²	25		150M/Box	1,980
RTW10ABK150	10 AWG	5.5mm ²	30		150M/Box	3,030
RTW8ABK100	8 AWG	8.0mm ²	40		100M/Box	3,160

TW Solid
Thermoplastic Water-resistant

RTW14AXBK150	14 AWG	1.6mm	25	Black	150M/Box	1,110
RTW12AXBK150	12 AWG	2.0mm	30		150M/Box	1,665
RTW10AXBK150	10 AWG	2.6mm	40		150M/Box	2,820

*Ampacity in accordance with NEC2009 for single-insulated conductor in free air with an ambient air temperature of 30°C.

FIXTURE WIRES



Flat Cord
Stranded, Parallel, Thermoplastic

RFC22A	SPT1	22 AWG	0.3mm ²	Black, White & Black/Red (Speaker Wire)	150M/Spool	810
RFC20A	SPT1	20 AWG	0.5mm ²		150M/Spool	1,140
RFC18A	SPT1	18 AWG	0.75mm ²		150M/Spool	1,455
RFC16A	SPT2	16 AWG	1.25mm ²		150M/Spool	2,325

COMMUNICATION CABLES

Product Description	Pcs./Ctn.	SRP		Pcs./Ctn.	SRP
<p>Coaxial Cable RG6, Copper Clad Steel Conductor, Triple Shield</p>			<p>LAN Cable Category 5e, Unshielded Twisted Pair, Grey Jacket</p>		
	RRG6CCSTS305	305M/ Plywood Reel		2,100	RCAT5EUTPGY305
<p>Coaxial Cable RG59, Copper Clad Steel Conductor, High Performance Braided Dual Shield</p>			<p>Telephone Cable 2 Twisted Pairs, Category 3, Unshielded Twisted Pair, Grey Jacket</p>		
	RRG59CCSDS305	305M/ Plywood Reel		1,820	R2PCAT3UTPGY500
			<p>Telephone Cable 1 Twisted Pair, Category 3, Unshielded Twisted Pair, Grey Jacket</p>		
				R1PCAT3UTPGY1000	1000M/ Plywood Reel