


ROVVI®

WIRES & CABLES

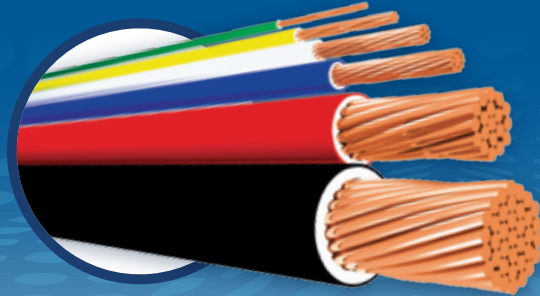

100%

- ✓ CONDUCTIVITY in VIRGIN COPPER
- ✓ LEAD-FREE PVC with DUAL INSULATION
- ✓ QUALITY PRODUCT

- 600 Volts
- Withstands 90°C in dry locations
- Withstands 75°C in wet locations

- FLAME RETARDANT
- SCRATCH & FRICTION RESISTANT
- SMOOTH NYLON FOR EASY INSTALLATION

THHN/THWN Stranded
Thermoplastic High Heat-resistant with Nylon / Thermoplastic High Water-resistant with Nylon

BUILDING WIRES

Product Description	Gauge	Size	90°C THHN Ampacity*	Color	M/Pkg	Base Price	
RTN14A	14 AWG	2.0mm ²	35	Red, Yellow, Green, Blue, White & Black	150M/Box	1,350	
				Red, White & Black	750M/Spool	6,750	
RTN12A	12 AWG	3.5mm ²	40	Red, Yellow, Green, Blue, White & Black	150M/Box	1,980	
				Red, White & Black	500M/Spool	6,600	
RTN10A	10 AWG	5.5mm ²	55	Red, Yellow, Green, Blue, White & Black	150M/Box	3,030	
				Black	350M/Spool	7,070	
					*500M/Coil	10,100	
RTN8A	8 AWG	8.0mm ²	75	Red, Yellow, Green, Blue, White & Black	100M/Box	3,160	
				Black	200M/Spool	6,320	
					*300M/Coil	9,480	
RTN6A	6 AWG	14mm ²	105	Red, Yellow, Green, Blue, White & Black	150M/Coil	7,545	
RTN4A	4 AWG	22mm ²	140			11,850	
RTN2A	2 AWG	30mm ²	170			17,265	
RTN1A	1 AWG	38mm ²	195			50,160	
RTN1/0A	1/0 AWG	50mm ²	235			56,340	
RTN2/0A	2/0 AWG	60mm ²	260			69,330	
RTN3/0A	3/0 AWG	80mm ²	320			85,920	
RTN4/0A	4/0 AWG	100mm ²	370			105,540	
RTN250M	250 MCM	125mm ²	420			300M/Reel	135,000
RTN300M	300 MCM	150mm ²	475				161,100
RTN400M	400 MCM	200mm ²	570	202,800			
RTN500M	500 MCM	250mm ²	655	261,000			



*Ampacity in accordance with NEC2009 for single-insulated conductor in free air with an ambient air temperature of 30°C.

*Until supplies last.

OCTOBER 2018 WIRES & CABLES PRICE LIST


(Prices are subject to change without prior notice)

FIREFLY ELECTRIC & LIGHTING CORP.

7/F Zen Offices Bldg. 1111 Natividad Lopez St., Ermita, Manila, Philippines
T: (02) 7891000 (Trunkline)
www.fireflyelectric.com • info@fireflyelectric.com


Contact Person:

BUILDING WIRES

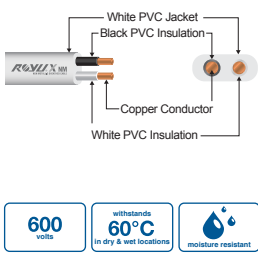

ROYUX NM
Non Metallic Sheathed Cable

Product Description	Type	Gauge	Size	60°C TW Ampacity*	Color	M/Pkg	Base Price
RNM14AXWT		14	1.6mm/2C		White	75M/Box	1,650
						300M/Coil	6,600
RNM12AXWT		12	2.0mm/2C			75M/Box	2,265
						300M/Coil	9,060
RNM10AXWT		10	2.6mm/2C			75M/Box	3,135

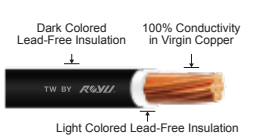

TW Stranded
Thermoplastic Water-resistant

RTW14ABK150	14 AWG	2.0mm ²	20	Black	150M/Box	1,350
RTW12ABK150	12 AWG	3.5mm ²	25		150M/Box	1,980
RTW10ABK150	10 AWG	5.5mm ²	30		150M/Box	3,030
RTW8ABK100	8 AWG	8.0mm ²	40		100M/Box	3,160



TW Solid
Thermoplastic Water-resistant

RTW14AXBK150	14 AWG	1.6mm	25	Black	150M/Box	1,110
RTW12AXBK150	12 AWG	2.0mm	30		150M/Box	1,665
RTW10AXBK150	10 AWG	2.6mm	40		150M/Box	2,820



*Ampacity in accordance with NEC2009 for single-insulated conductor in free air with an ambient air temperature of 30°C.

FIXTURE WIRES



Flat Cord
Stranded, Parallel, Thermoplastic

RFC22A	SPT1	22 AWG	0.3mm ²	Black, White & Black/Red (Speaker Wire)	150M/Spool	810
RFC20A	SPT1	20 AWG	0.5mm ²		150M/Spool	1,140
RFC18A	SPT1	18 AWG	0.75mm ²		150M/Spool	1,455
RFC16A	SPT2	16 AWG	1.25mm ²		150M/Spool	2,325

COMMUNICATION CABLES

Product Description	Pcs./Ctn.	SRP		Pcs./Ctn.	SRP
<p>Coaxial Cable RG6, Copper Clad Steel Conductor, Triple Shield</p>			<p>LAN Cable Category 5e, Unshielded Twisted Pair, Grey Jacket</p>		
RRG6CCSTS305	305M/ Plywood Reel	2,100		RCAT5EUTPGY305	305M/ Pulley Box
<p>Coaxial Cable RG59, Copper Clad Steel Conductor, High Performance Braided Dual Shield</p>			<p>Telephone Cable 2 Twisted Pairs, Category 3, Unshielded Twisted Pair, Grey Jacket</p>		
RRG59CCSDS305	305M/ Plywood Reel	1,820		R2PCAT3UTPGY500	500M/ Plywood Reel
			<p>Telephone Cable 1 Twisted Pair, Category 3, Unshielded Twisted Pair, Grey Jacket</p>		
				R1PCAT3UTPGY1000	1000M/ Plywood Reel